





Combining compact and stylish design with advanced combustion technology, this high-efficiency, EPA-certified fireplace delivers optimal heat and modern refinement in one outstanding showpiece.



FEATURED WRT3920 with Surround Kit and Decorative Keystone option

# **EXCLUSIVE FEATURES**


- High efficiency, EPA certified wood heater
- Clean and stylish circulating radiant design
- Ceramic glass opening with air wash system that keeps the glass clean
- Precision laser-cut heavy door with heat resistant door handle and easy-close latch
- Primary air combustion control for variable heat output
- Advanced Combustion System with bypass control for maximum performance
- √ 55,000 BTUs and heats up to 1,500 square feet\*
- 175 CFM blower included for gentle air distribution into the room
- Increased heat distribution with the optional Forced Air Heating Kit
- 4 2.0 cubic feet insulated firebox that accepts up to 18" log size for increased performance
- White stacked, textured, interior panels with integrated ash lip and heavy steel log retainer
- Durable, high-temperature paint finish
- Includes insulated outside air kit (required for use)
- Uses 6" insulated wood burning chimney
- 4 20-Year Limited Warranty

<sup>\*</sup>Square-foot heating capacities are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

### **ADVANCED COMBUSTION SYSTEM**

- FULL CONTROL OF BURN RATE allows for long overnight burns, a big advantage over single-rate systems
- **COMBINES THE BENEFITS** of both catalytic technology and a secondary air combustion system
- MAXIMUM COMBUSTION efficiency produces more heat while reducing emissions
- EASY ACCESS BYPASS CONTROL allows smoke direct access to chimney for startup and reloading


# **ENGINEERING FEATURES AND SPECIFICATIONS**

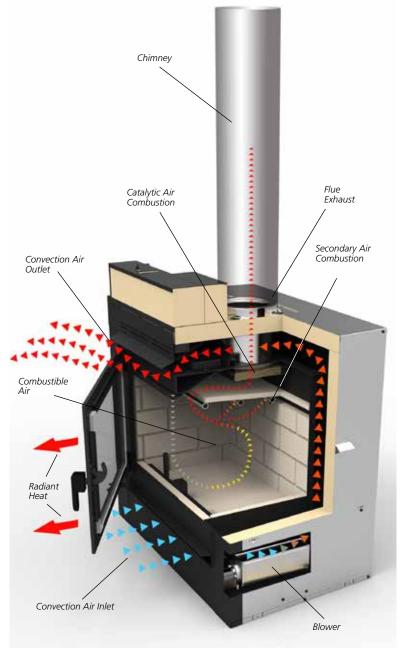

#### **FORCED AIR KIT**

Share the warmth. The optional Forced Air Kit provides up to 25% more heat from the same fire. This additional heat can be distributed up to 25 feet, to three additional rooms,

including rooms on a lower floor. The included thermostat allows automatic control of heat distribution for balanced and controlled comfort.



# **OPTIONAL ACCESSORIES**

- Cast Iron Surround Kit
- Decorative Keystone (Cast Iron Surround Kit Required)
- Forced Air Kit for forced air zone heating to multiple locations

# **SURROUND KIT OPTIONS**





Cast Iron Surround Kit




Cast Iron Surround Kit w/Decorative Keystone Option

# Front View





Left Side View





#### IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location.

Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.





Α	С	D	E	F	G	J
36"	31-3/8"	14-7/8"	74-3/8"	37-1/4"	*22"	52-5/8"
915mm	797mm	378mm	1889mm	946mm	559mm	1337mm

 $<sup>^{\</sup>star}$  Total depth is 22-1/2" (572mm) including the back spacer minus 1/2" (13mm) for drywall to be flush with the facing.

PRODUCT SPECIFICATIONS				
Glass Viewing Area (W x H)	20" x 13-1/4"			
Firebox Interior (W x H x D+)	19-1/2" x 13-1/4" x 12"			
Interior Cubic Feet	2.0			
Maximum Log Size	18"			
Chimney Size	6"			
EPA Rating	1.8 grams/hr			
BTUs	55,000			
Heating Capacity (up to)	1,500 sq. ft.			
Blower	175 CFM			
Weight	215 lbs.			

+Measured in front of door



© Innovative Hearth Products 2018 785707M 0318

