


HIGH COUNTRY™ 3000 WOOD FIREPLACE


Specifications

Model	BTU	Width		Height		Depth		Glass
		Actual	Framing	Actual	Framing	Actual	Framing	
NZ3000	60,000	42	42 1/2	43 1/4	44	29 1/4	29 1/2	12 1/2 x 17

Overview

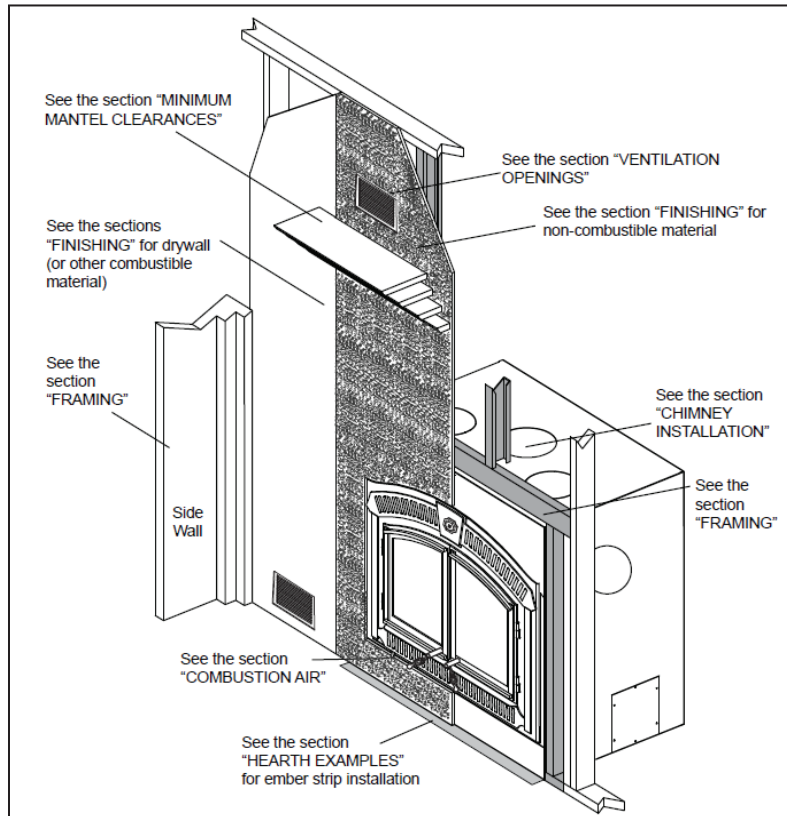

Dimensions

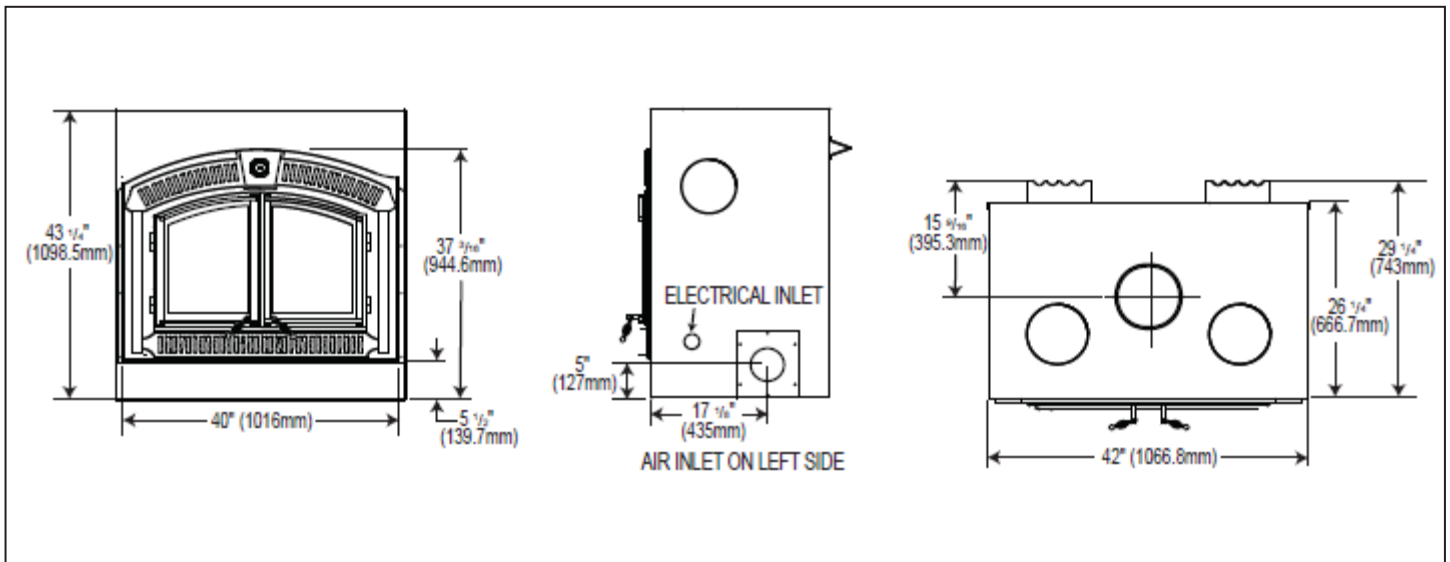

HIGH COUNTRY™ 3000 WOOD FIREPLACE

Framing & Clearances


Minimum Fireplace Clearances

MAINTAIN THESE MINIMUM CLEARANCES TO COMBUSTIBLES:


Framed Enclosure:	
Rear	- 0" to stand-offs
Sides	- 6" (152.4mm)
Ceiling (Enclosure)	- 84" (2133.6mm) from the base of the appliance
Ceiling (Room)	- 84" (2133.6mm) from the base of the appliance
Chimney	- 2" (50.8mm)
Hot Air Gravity Ductwork Insulation	- 1" (25.4mm)

Objects placed in front of the appliance must be kept a minimum of 48" (1219.2mm) away from the front of the appliance.

Appliance Location

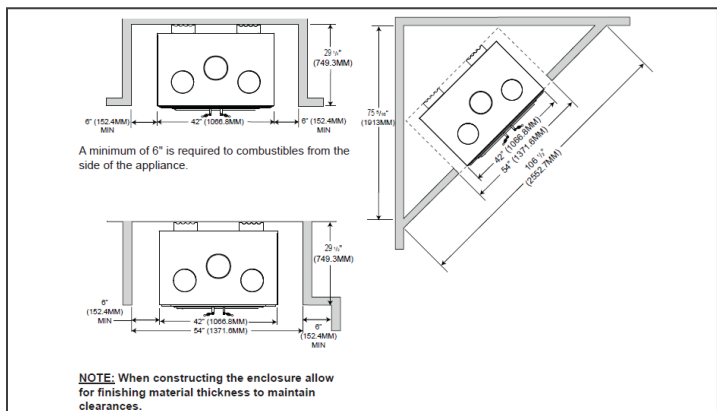


Finishing

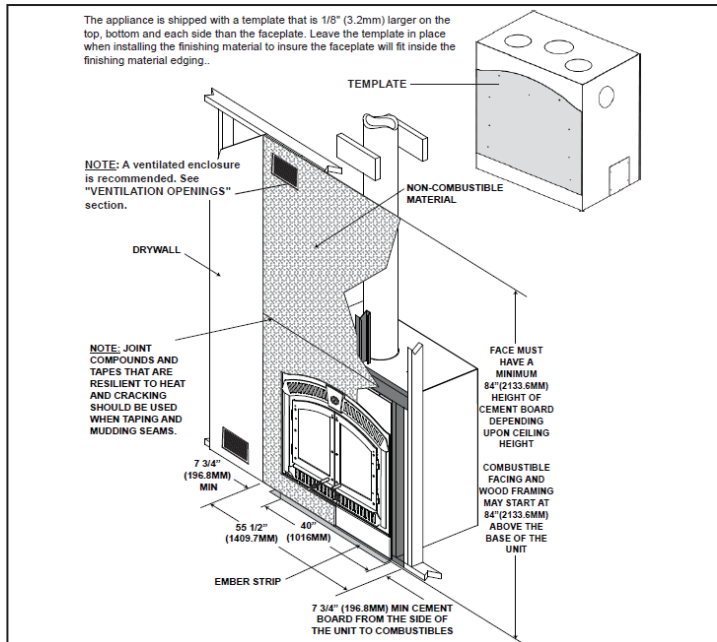


Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.

Framing Dimensions

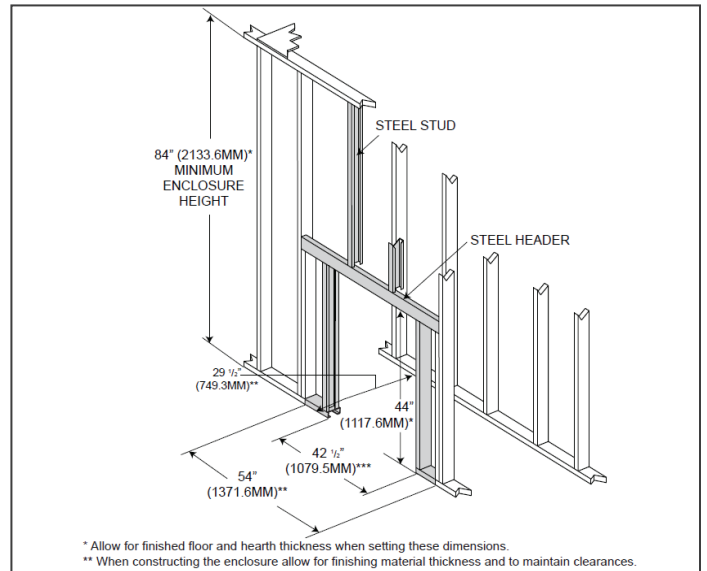

Typical Chimney Installation

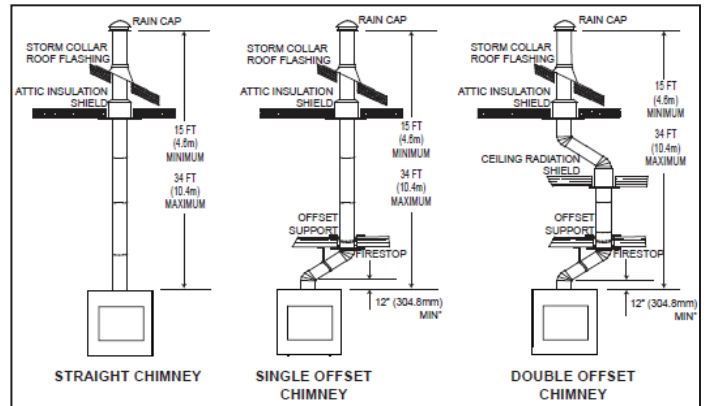

Combustible Mantel Clearances

